

mindray

uMEC12 Vet

Safety & Efficiency for Veterinary Monitoring



Distributed by **NP Intertrade Co, Ltd**


Tel: 02-003-4398, 085-136-4688, 089-890-3767, 081-306-4662, 084-333-7509

www.npintertrade.com

Accurate Monitoring

With nearly 30 years of technical accumulation, uMEC Veterinary Monitor is the reliable choice for animal monitoring by providing comprehensive and accurate parameter measurements and animal-specific accessories.

Special animal algorithm

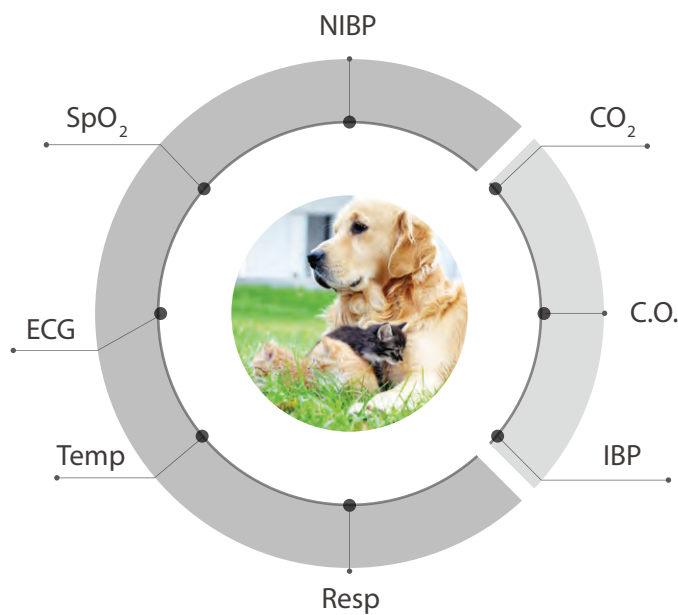

- NIBP Animal specific algorithm can detect weak signal and interference for animal ensuring measurement quickly and accurately
- SpO₂ Advanced technologies for interferences and weak perfusion
- ECG The unique patented ECG algorithm and ECG Smart Lead ensure stable monitoring
- Side-stream CO₂ Gold-standard Artema technology for accurate measurements

Professional accessories



ECG:
ECG crocodile clips will prevent falling and ensure signal stability



SpO₂:
Clips for animal tongue and ear



NIBP:
Multi-size cuffs for different animals



Efficiency and Easy to Use

uMEC Veterinary monitor is designed for ease of use and will make your work easier.

- 12.1 inches high resolution LED screen with optional touch screen
- Unique accessory cabinet makes accessories management effective
- Less than 4kg weight with battery make it portable



Reliable and Durable

To be effective in different environment, uMEC has low-power design and a series of rigorous tests to ensure long time use.

Low Power Design



No-fan Design



Low Power Consumption



Durable components

Multi-scenario Tests



Resistance 0.75m fall



Durable and robust casing

Technical Specifications

Display	12.1 inches, color LED, touch screen(optional)
Resolution (pixels)	800 x 600
Weight (kg)	<4.0kg
Battery	Standard: Chargeable Lithium-Ion, 2.5Ah Optional: Chargeable Lithium-Ion, 5Ah
Runtime	Standard > 4 h Optional: > 8 h
Basic Parameters	ECG, SpO ₂ , NIBP, PR, RR, Temp
Extended Parameters	CO ₂ , IBP, C.O.
Data Storage	Trends: 120 hours Mid-length trends: 4 hours Long-trends: 1200 hours Parameter alarms: 1800 Arrh. Events: 128 NIBP measurements: 1600 sets Full-disclosure waveforms: 48 hours at maximum.
ECG	
Lead type	3/5 lead
HR range(bpm)	15 ~350
SpO ₂	
SpO ₂ range(%)	0 ~ 100
PI Range (%)	0.05 ~ 20
NIBP	
Operation mode	Manual, STAT, Sequence
CO ₂	Infrared absorption
Sample flowrate	120 ml/min, 90ml/min
Range (%)	0 ~ 20

